

Femoral Tibial Spreaders with Scale – Small

Helps separate the femur and tibia during total knee replacement surgery

Designed to remain in position, with the femur and tibia separated, without the need of an assistant, and to minimize crushing the bone, even if osteoporotic. A wide unobstructed view of the posterior compartment is possible. Osteophytes on the posterior condyles of the femur and tibia can be seen and removed. The scale on the spreader handle makes it possible for two spreaders to be used to assist the surgeon in balancing ligaments.

Standard Grip

PRODUCT NO'S:

SMALL WITH STANDARD GRIP

1850 [Small with Standard Grip and Grooved Pads]

Overall Length: 7" (17,8 cm)
Pads: 23 x 12 mm
Opens to: 39 mm

1850-D [Small with Standard Grip and Diamond Cut Pads]

Overall Length: 7" (17,8 cm)
Pads: 21,9 x 14,5 mm
Opens to: 38 mm

1850-01 [Small with Standard Grip and Coated Pads]

Overall Length: 7" (17,8 cm)
Pads: 18 x 15 mm
Opens to: 39 mm

1865 [Small with Standard Grip and Round Pads]

Overall Length: 7" (17,8 cm)
Pads: 25 x 25 mm
Opens to: 39 mm



Small with Standard Grip and Grooved Pads
#1850

Small with Standard Grip and Diamond Cut Pads
#1850-D
(Not Shown)

Small with Standard Grip and Coated Pads
#1850-01

Coated pads help protect component surfaces when implants are in place, and are slightly contoured to add stability against the curved articulating implant surfaces

Small with Standard Grip and Round Pads
#1865



Grooved Pads

Diamond Cut Pads

Coated Pads

Round Pads


Small – 7"



Scale in millimeters on the spreader handle

Designed with the grip closer together for easier gripping and to help reduce hand fatigue

Small Grip Handle



PRODUCT NO'S:

SMALL WITH SMALL GRIP

1850-SG [Small with Grooved Pads and Small Grip Handle]

Overall Length: 7" (17,8 cm)
Pads: 23 x 12 mm
Opens to: 39 mm

1850-01-SG [Small with Coated Pads and Small Grip Handle]

Overall Length: 7" (17,8 cm)
Pads: 18 x 15 mm
Opens to: 39 mm

1865-SG [Small with Round Pads and Small Grip Handle]

Overall Length: 7" (17,8 cm)
Pads: 25 x 25 mm
Opens to: 39 mm



Small with Small Grip and Grooved Pads
#1850-SG

Small with Small Grip and Coated Pads
#1850-01-SG

Small with Small Grip and Round Pads
#1865-SG

Coated pads help protect component surfaces when implants are in place, and are slightly contoured to add stability against the curved articulating implant surfaces

Locking Mechanism

PRODUCT NO'S:

SMALL WITH LOCKING MECHANISM

1850-LR [Small with Locking Mechanism and Grooved Pads]

Overall Length: 7" (17,8 cm)
Pads: 23 x 12 mm
Opens to: 39 mm

1865-LR [Small with Locking Mechanism and Round Pads]

Overall Length: 7" (17,8 cm)
Pads: 25 x 25 mm
Opens to: 39 mm



Small with Locking Mechanism and Grooved Pads
#1850-LR

Small with Locking Mechanism and Round Pads
#1865-LR

Locking ratchet mechanism helps prevent accidental release, and provides for controlled adjustment and easy release

– See Reverse Side For Other Styles and Sizes –



www.innomed.net



INNOMED

ISO 13485:2016

FREE TRIAL ON MOST INSTRUMENTS




103 Estus Drive, Savannah, GA 31404
info@innomed.net

912.236.0000 Phone
912.236.7766 Fax

Innomed-Europe Tel. +41 41 740 67 74
info@innomed-europe.com

1.800.548.2362

© 2026 Innomed, Inc.

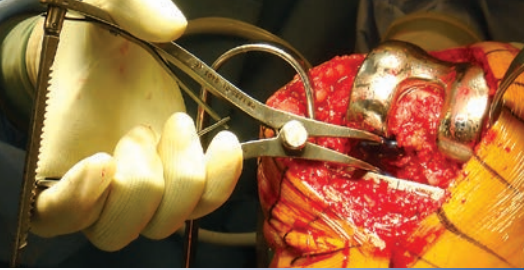

Femoral Tibial Spreaders with Scale – Medium & Large

Helps separate the femur and tibia during total knee replacement surgery

Designed to remain in position, with the femur and tibia separated, without the need of an assistant, and to minimize crushing the bone, even if osteoporotic. A wide unobstructed view of the posterior compartment is possible. Osteophytes on the posterior condyles of the femur and tibia can be seen and removed. The scale on the spreader handle makes it possible for two spreaders to be used to assist the surgeon in balancing ligaments.

Medium – Locking Mechanism

PRODUCT NO'S:
MEDIUM WITH SPEED LOCK GRIP
1855-SL [Medium with Speed Lock Grip and Grooved Pads]
Overall Length: 10" (25,4 cm)
Pads: 23 x 14 mm
Opens to: 50 mm



Speed lock modification designed by Nasim A. Rana, MD

Medium – Standard Grip

PRODUCT NO'S:
MEDIUM WITH STANDARD HANDLE
1855 [Medium with Standard Grip and Grooved Pads]
Overall Length: 10" (25,4 cm)
Pads: 23 x 14 mm
Opens to: 50 mm
1855-D [Medium with Standard Grip and Diamond Cut Pads]
Overall Length: 10" (25,4 cm)
Pads: 23 x 14 mm
Opens to 50 mm
1866 [Medium with Standard Grip and Round Pads]
Overall Length: 10" (25,4 cm)
Pads: 25 x 25 mm
Opens to: 50 mm



MADE EXCLUSIVELY FOR INNOVATED IN GERMANY

Large – Standard Grip

PRODUCT NO'S:
LARGE WITH STANDARD GRIP
1860 [Large with Standard Handle and Grooved Pads]
Overall Length: 12" (30,5 cm)
Pads: 25 x 16 mm
Opens to: 65 mm




MADE EXCLUSIVELY FOR INNOVATED IN GERMANY

– See Reverse Side For Other Styles and Sizes –

Medium with Speed Lock and Grooved Pads #1855-SL

Speed lock helps allow precise control and prevent unintended release


Medium – 10"

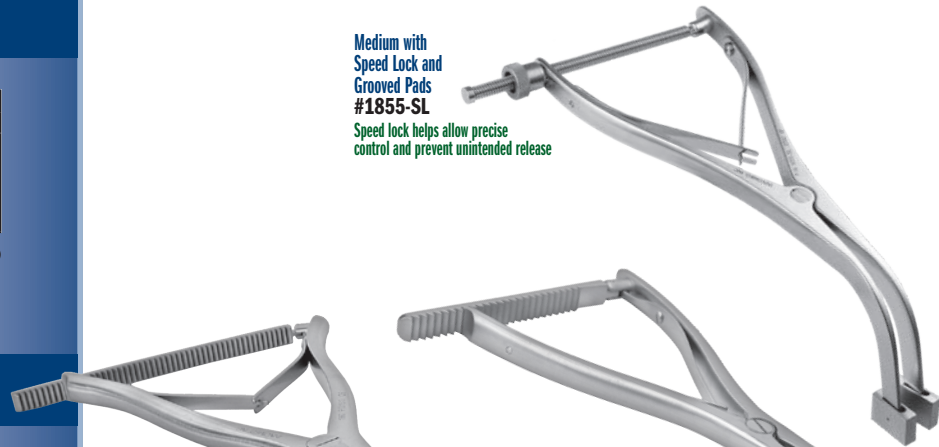

Medium with Standard Grip and Grooved Pads #1855

Medium with Standard Grip and Diamond Cut Pads #1855-D (Not Shown)

Medium with Standard Grip and Round Pads #1866

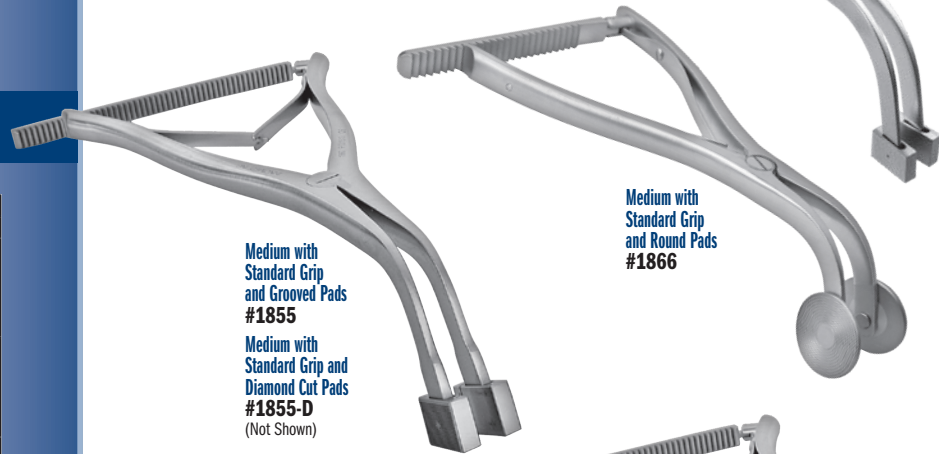

Large with Standard Grip and Grooved Pads #1860

Large – 12"



Grooved Pads

Diamond Cut Pads

Round Pads



Scale in millimeters on the spreader handle

Reference Measurement Statement (Non-Measuring Function)

This device is not intended to provide quantitative measurements and does not incorporate a measuring function as defined under Regulation (EU) 2017/745 (MDR). Any scales, markings, or visual indicators present on the device are provided solely for reference and orientation purposes to support general use. These indicators are not calibrated against traceable standards and have not been validated for accuracy, precision, or repeatability.

Accordingly, values derived from these markings shall be considered approximate only and must not be used where accurate or traceable measurements are required for clinical decision-making, diagnosis, or other applications requiring defined metrological performance.

Users shall rely only on devices specifically intended and validated for measurement when quantitative accuracy is required.

www.innomed.net



INNOMED

ISO 13485:2016

FREE TRIAL ON MOST INSTRUMENTS



103 Estus Drive, Savannah, GA 31404
info@innomed.net

912.236.0000 Phone
912.236.7766 Fax

Innomed-Europe Tel. +41 41 740 67 74
info@innomed-europe.com

1.800.548.2362

© 2026 Innomed, Inc.